

CONTADORES DIGITALES Y PULSERS



**FOR ANTIFREEZE
AND WINDSHIELD
WASHING LIQUID**
Flow rate **40 l/min**



FOR DIESEL FUEL
Flow rate **90/120 l/min**



**FOR OIL AND
ALLIED PRODUCTS**
Flow rate **35/70/100 l/min**



**ADVANCED FLUID
MANAGEMENT SOLUTIONS**



**Made
in Italy**



**ADVANCED FLUID
MANAGEMENT SOLUTIONS**



EL DISEÑO ES UN

Arte






DIGITAL METER AND PULSER

for lubricating oil, hydraulic oil, diesel fuel, antifreeze and windshield washing liquid and allied products




MEASURING PRINCIPLE

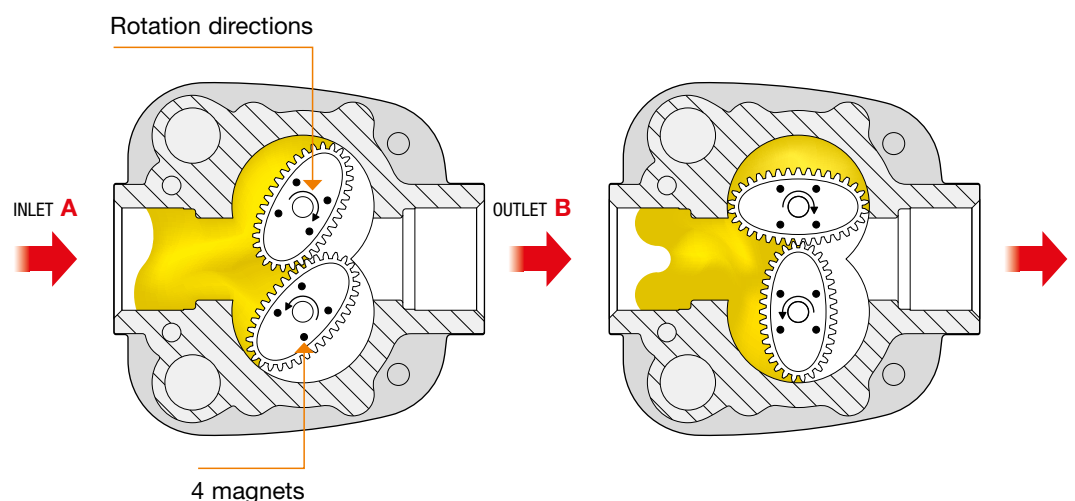

When the fluid enter in the oval gear chamber through the inlet “A”, the gears start to rotate.

The gears start to rotate because of the pressure of the fluid which comes out from the outlet “B”.

Each rotation corresponds to a determinate quantity of fluid.

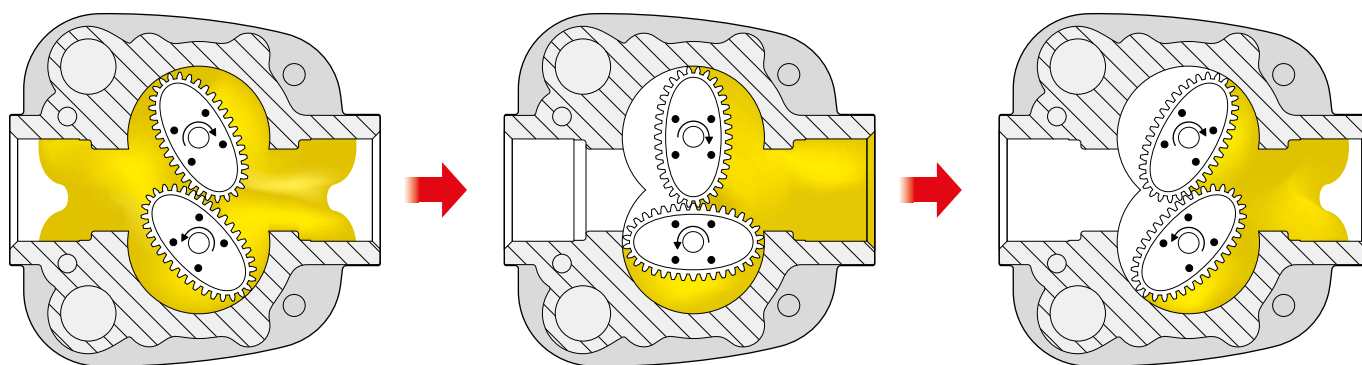

Correct dimensional tollerances between gears and chamber grant the reliability and the accuracy of the meter.

4 magnets, placed on one of the two gear, give the pulses to the microprocessor during every rotation.

R A A S M


Intends to “offer the best” through a continuous improvement in terms of performance, functionality and product’s reliability.



The new electronic meter is the result of intense research and testing, combining modern manufacturing technology with a simple and intuitive design.

All the components are produced in Italy, including the electronic board. Suitable for use in indoor and outdoor environments, the aluminium body is rugged and resists contamination. The sealed electronic board provides continuous reliability.

TECHNICAL Features

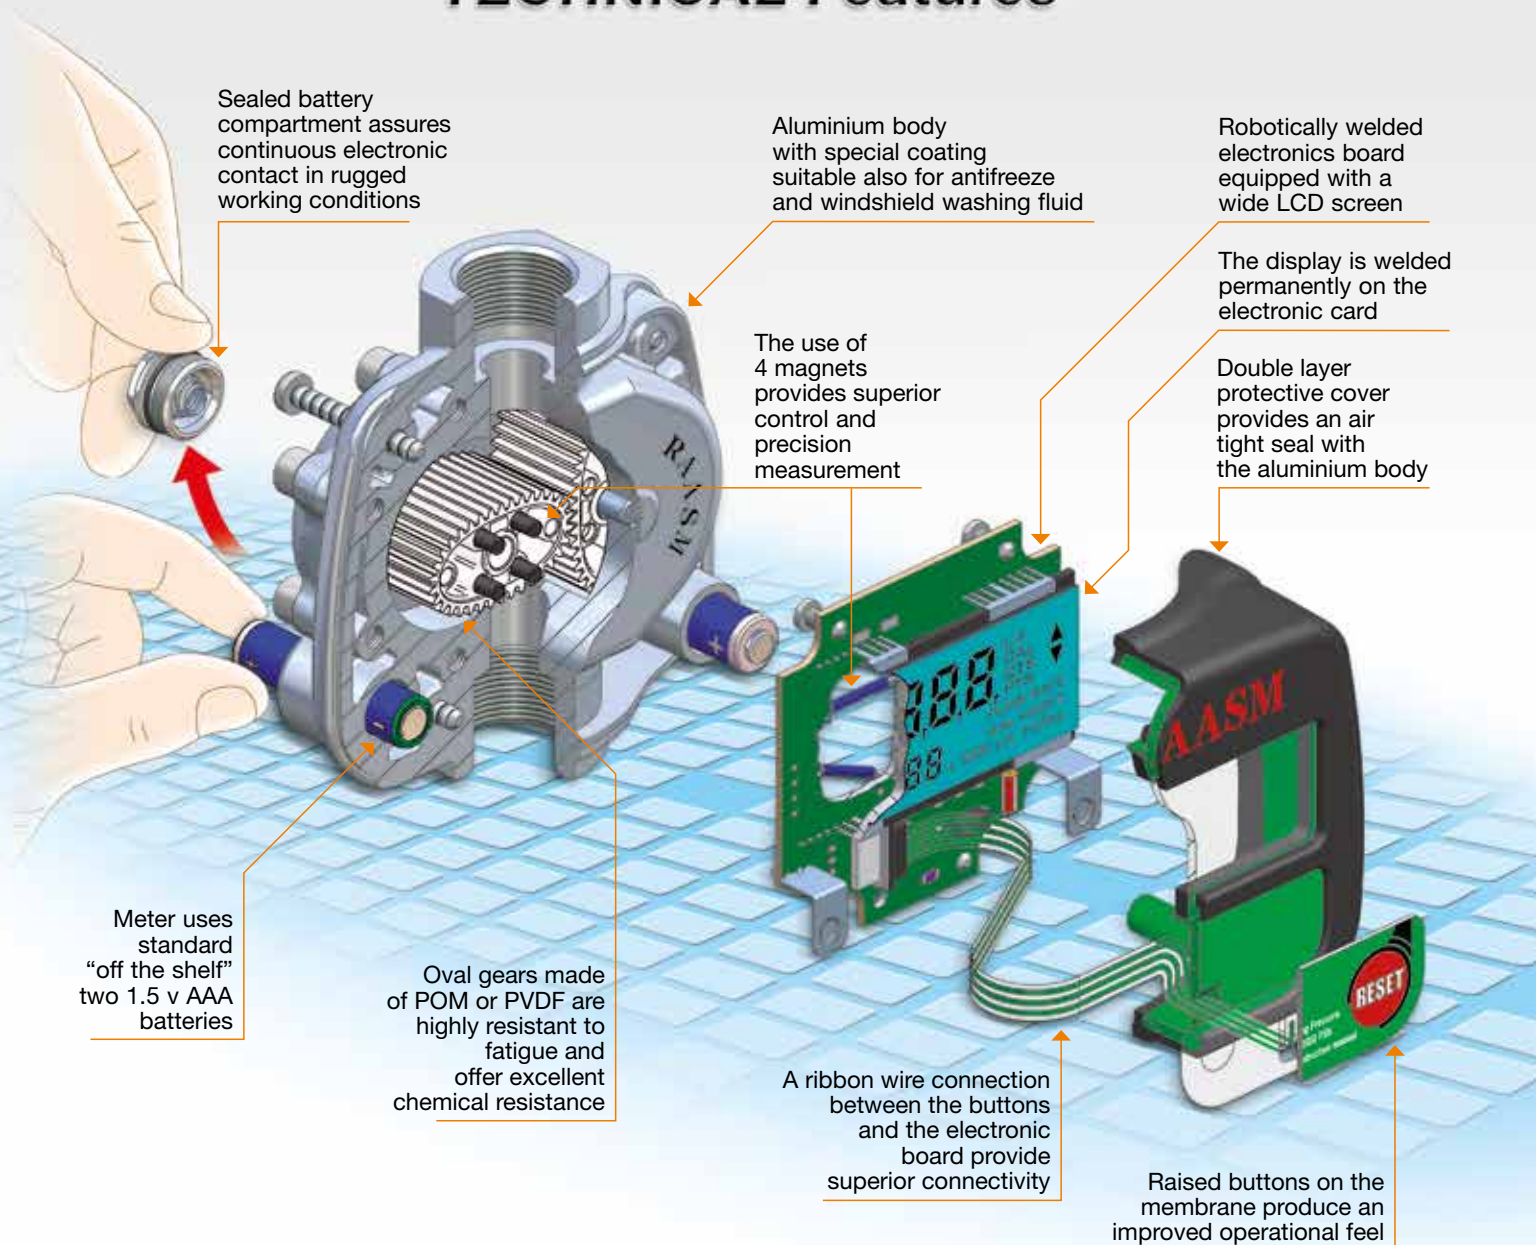

PERFORMANCE

- Precision $\pm 0,3\%$ • Repeatability $\pm 0,2\%$ • Pressure loss $< 0,5$ bars at max flow rate • Temperature $\Delta T -10 \div +60$ °C ($-14 \div +140$ °F)

The display shows simple and intuitive information to allow easy use



DIGITAL Meter

Flow rate **35 l/min**

Flow rate **70 l/min**

Flow rate **100 l/min**

RAASM's digital meters, besides gauging the liquid delivered, can show instant flow rates, provide a reset total and allow the setting of different units of measurement.

RAASM's digital meters are suitable for a wide variety of fluids, from low to medium to high viscosities, including lubricants, diesel fuel, antifreeze, window wash liquid and other fluids compatible with the material of the meter.



Not type-approved for public use

	FOR OIL AND ALLIED PRODUCTS	FOR OIL AND ALLIED PRODUCTS	FOR OIL AND ALLIED PRODUCTS	
Article	0251	0253	0254	
Compatible fluids	Oil and allied products	Oil and allied products	Oil and allied products	
Body's material	Aluminium	Aluminium	Aluminium	
Gear's material	POM	POM	POM	
Inlet	G 1/2" (f)	G 3/4" (f)	G 1" (f) + Flange	
Outlet	G 1/2" (f)	G 3/4" (f)	G 1" (f) + Flange	
Delivery	1 - 35 l/min	1 - 70 l/min	1 - 100 l/min	
Max operating pressure	70 bar	70 bar	70 bar	
Burst pressure	200 bar	200 bar	200 bar	
Accuracy	± 0,3%	± 0,3%	± 0,3%	
Net weight 	0,485 kg	0,790 kg	1,100 kg	
Packing 	N° 1 - 0,0015 m³	N° 1 - 0,0018 m³	N° 1 - 0,005 m³	
Gross weight 	0,85 kg	1 kg	1,35 kg	
Dimensions (A - B - C)	94 - 90 - 55 mm	94 - 91 - 77 mm	109 - 91 - 99 mm	

Meters mounted
on line







Flow rate **90 l/min**

Flow rate **120 l/min**

Flow rate **40 l/min**

DIMENSIONS



FOR DIESEL FUEL

FOR DIESEL FUEL

FOR ANTIFREEZE AND
WINDSHIELD WASHING LIQUID

4104

4105

0252

Diesel fuel

Diesel fuel

Antifreeze and windshield
washing liquid

Aluminium

Aluminium

Oxidized aluminium

POM

POM

PVDF

G 3/4" (f)

G 1" (f) + Flange

G 1/2" (f)

G 3/4" (f)

G 1" (f) + Flange

G 1/2" (f)

1 - 90 l/min

1 - 120 l/min

1 - 40 l/min

70 bar

70 bar

70 bar

200 bar

200 bar

200 bar

± 0,3%

± 0,3%

± 0,3%

0,790 kg

1,100 kg

0,485 kg

N° 1 - 0,0018 m³

N° 1 - 0,005 m³

N° 1 - 0,0015 m³

1 kg

1,35 kg

0,85 kg

94 - 91 - 77 mm

109 - 91 - 99 mm

94 - 90 - 55 mm

Meter with oil valve
and nozzle




R A A S M

PULSER METER



Industrial meter assembly department organised to make a product ready for the final testing where meters are checked one by one.

TECHNICAL Features

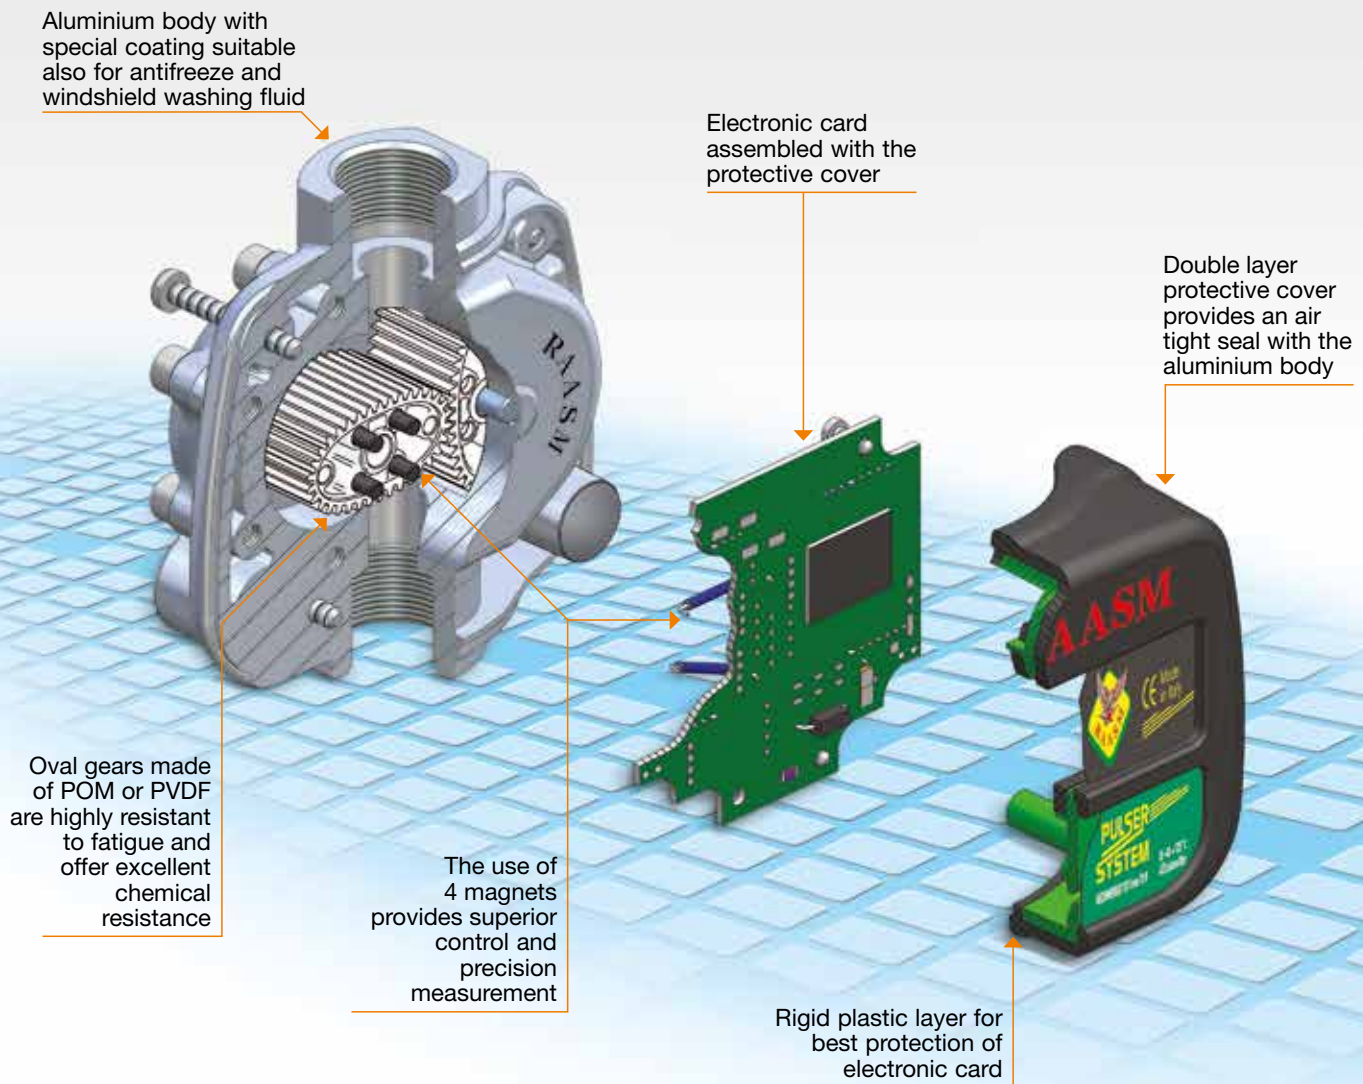

PERFORMANCE

- Precision $\pm 0,3\%$
- Repeatability $\pm 0,2\%$
- Voltage max 120 V 10 W max
- Max amperage 0,5 A max
- Temperature ΔT $-20 \div +70$ °C ($-14 \div +158$ °F)
- Length of the wire 1,5 m
- Kind of signal: clean contact (Reed switch)
- 2 channels (in quadrature)
- not type-approved for public use





PULSER Meter

Flow rate **35 l/min**

Flow rate **70 l/min**

Flow rate **100 l/min**

The pulser meter

is used to measure fluids and to transmit data. It is usually installed on centralized lubrication system to control and manage delivery of fluids.



Not type-approved for public use

	FOR OIL AND ALLIED PRODUCTS	FOR OIL AND ALLIED PRODUCTS	FOR OIL AND ALLIED PRODUCTS	
Article	0222	0223	0226	
Compatible fluids	Oil and allied products	Oil and allied products	Oil and allied products	
Body's material	Aluminium	Aluminium	Aluminium	
Gear's material	POM	POM	POM	
Inlet	G 1/2" (f)	G 3/4" (f)	G 1" (f) + Flange	
Outlet	G 1/2" (f)	G 3/4" (f)	G 1" (f) + Flange	
Delivery	1 - 35 l/min	1 - 70 l/min	1 - 100 l/min	
Max operating pressure	70 bar	70 bar	70 bar	
Burst pressure	200 bar	200 bar	200 bar	
Accuracy	± 0,3 %	± 0,3 %	± 0,3 %	
Pulser per liter	842	423	282	
Max voltage	48 V DC Max	48 V DC Max	48 V DC Max	
Max amperage	0,5 A	0,5 A	0,5 A	
Max power	10 W	10 W	10 W	
Net weight 	0,485 kg	0,790 kg	1,100 kg	
Packing 	N° 1 - 0,0015 m³	N° 1 - 0,0018 m³	N° 1 - 0,005 m³	
Gross weight 	0,85 kg	1 kg	1,35 kg	
Dimensions (A - B - C)	94 - 90 - 55 mm	94 - 91 - 77 mm	109 - 91 - 99 mm	

Pulser mounted
on line




Flow rate **90 l/min**

Flow rate **120 l/min**

Flow rate **40 l/min**

DIMENSIONS

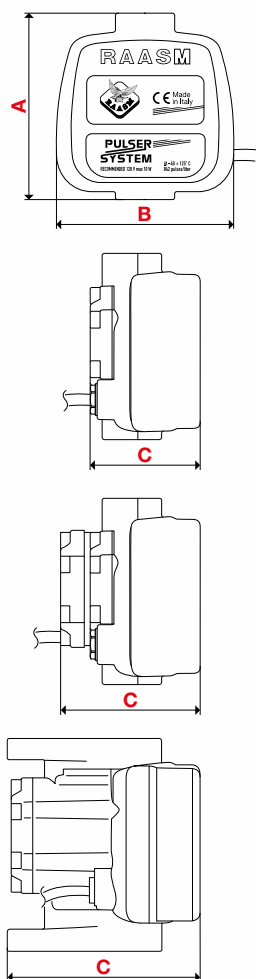

FOR DIESEL FUEL	FOR DIESEL FUEL	FOR ANTIFREEZE AND WINDSHIELD WASHING LIQUID
0225	0227	0224
Diesel fuel	Diesel fuel	Antifreeze and windshield washing liquid
Aluminium	Aluminium	Oxidized aluminium
POM	POM	PVDF
G 3/4" (f)	G 1" (f) + Flange	G 1/2" (f)
G 3/4" (f)	G 1" (f) + Flange	G 1/2" (f)
1 - 90 l/min	1 - 120 l/min	1 - 40 l/min
70 bar	70 bar	70 bar
200 bar	200 bar	200 bar
± 0,3 %	± 0,3 %	± 0,3 %
412	275	806
48 V DC Max	48 V DC Max	48 V DC Max
0,5 A	0,5 A	0,5 A
10 W	10 W	10 W
0,790 kg	1,100 kg	0,485 kg
N° 1 - 0,0018 m³	N° 1 - 0,005 m³	N° 1 - 0,0015 m³
1 kg	1,35 kg	0,85 kg
94 - 91 - 77 mm	109 - 91 - 99 mm	94 - 90 - 55 mm



Single valve pulser meter connected with solenoid valve to be used with FCS system



TECNOLOGÍA

La investigación y el desarrollo de nuevas soluciones que acabarán convirtiéndose en productos de vanguardia de la más alta calidad totalmente fabricados en Italia, es el principal punto de partida de todo el ciclo de producción



CALIDAD

Desde siempre, la calidad es una preocupación básica en la creación de productos **RAASM**. Para obtenerla es indispensable la ejecución de un sinfín de pruebas altamente exigentes y rigurosas



FUNCIONABILIDAD

RAASM dispone de la más completa gama de productos para lubricación y distribución de fluidos. El objetivo es el de dar siempre una respuesta satisfactoria a las demandas de nuestros clientes y cubrir sus exigencias



Company with an
ISO 9001:2015
certified quality
management system

RAASM S.p.A.
36022 S. ZENO DI CASSOLA (VI)
Via Marangoni, 33 - ITALY

GF GESFLUID

GESTIÓN INTEGRAL DE EQUIPAMIENTOS INDUSTRIALES / INTEGRAL MANAGEMENT FOR INDUSTRIAL EQUIPMENTS

C/Candás, 20 Bajo - 33207 Gijón - Asturias - España
Tel. (+34) 984 05 00 90
gesfluid@gesfluid.es - www.gesfluid.es