



**ADVANCED FLUID
MANAGEMENT SOLUTIONS**

GF
GESFLUID


GESTIÓN INTEGRAL DE EQUIPAMIENTOS INDUSTRIALES
INTEGRAL MANAGEMENT FOR INDUSTRIAL EQUIPMENTS

SERIES
250
300



HOSE REELS



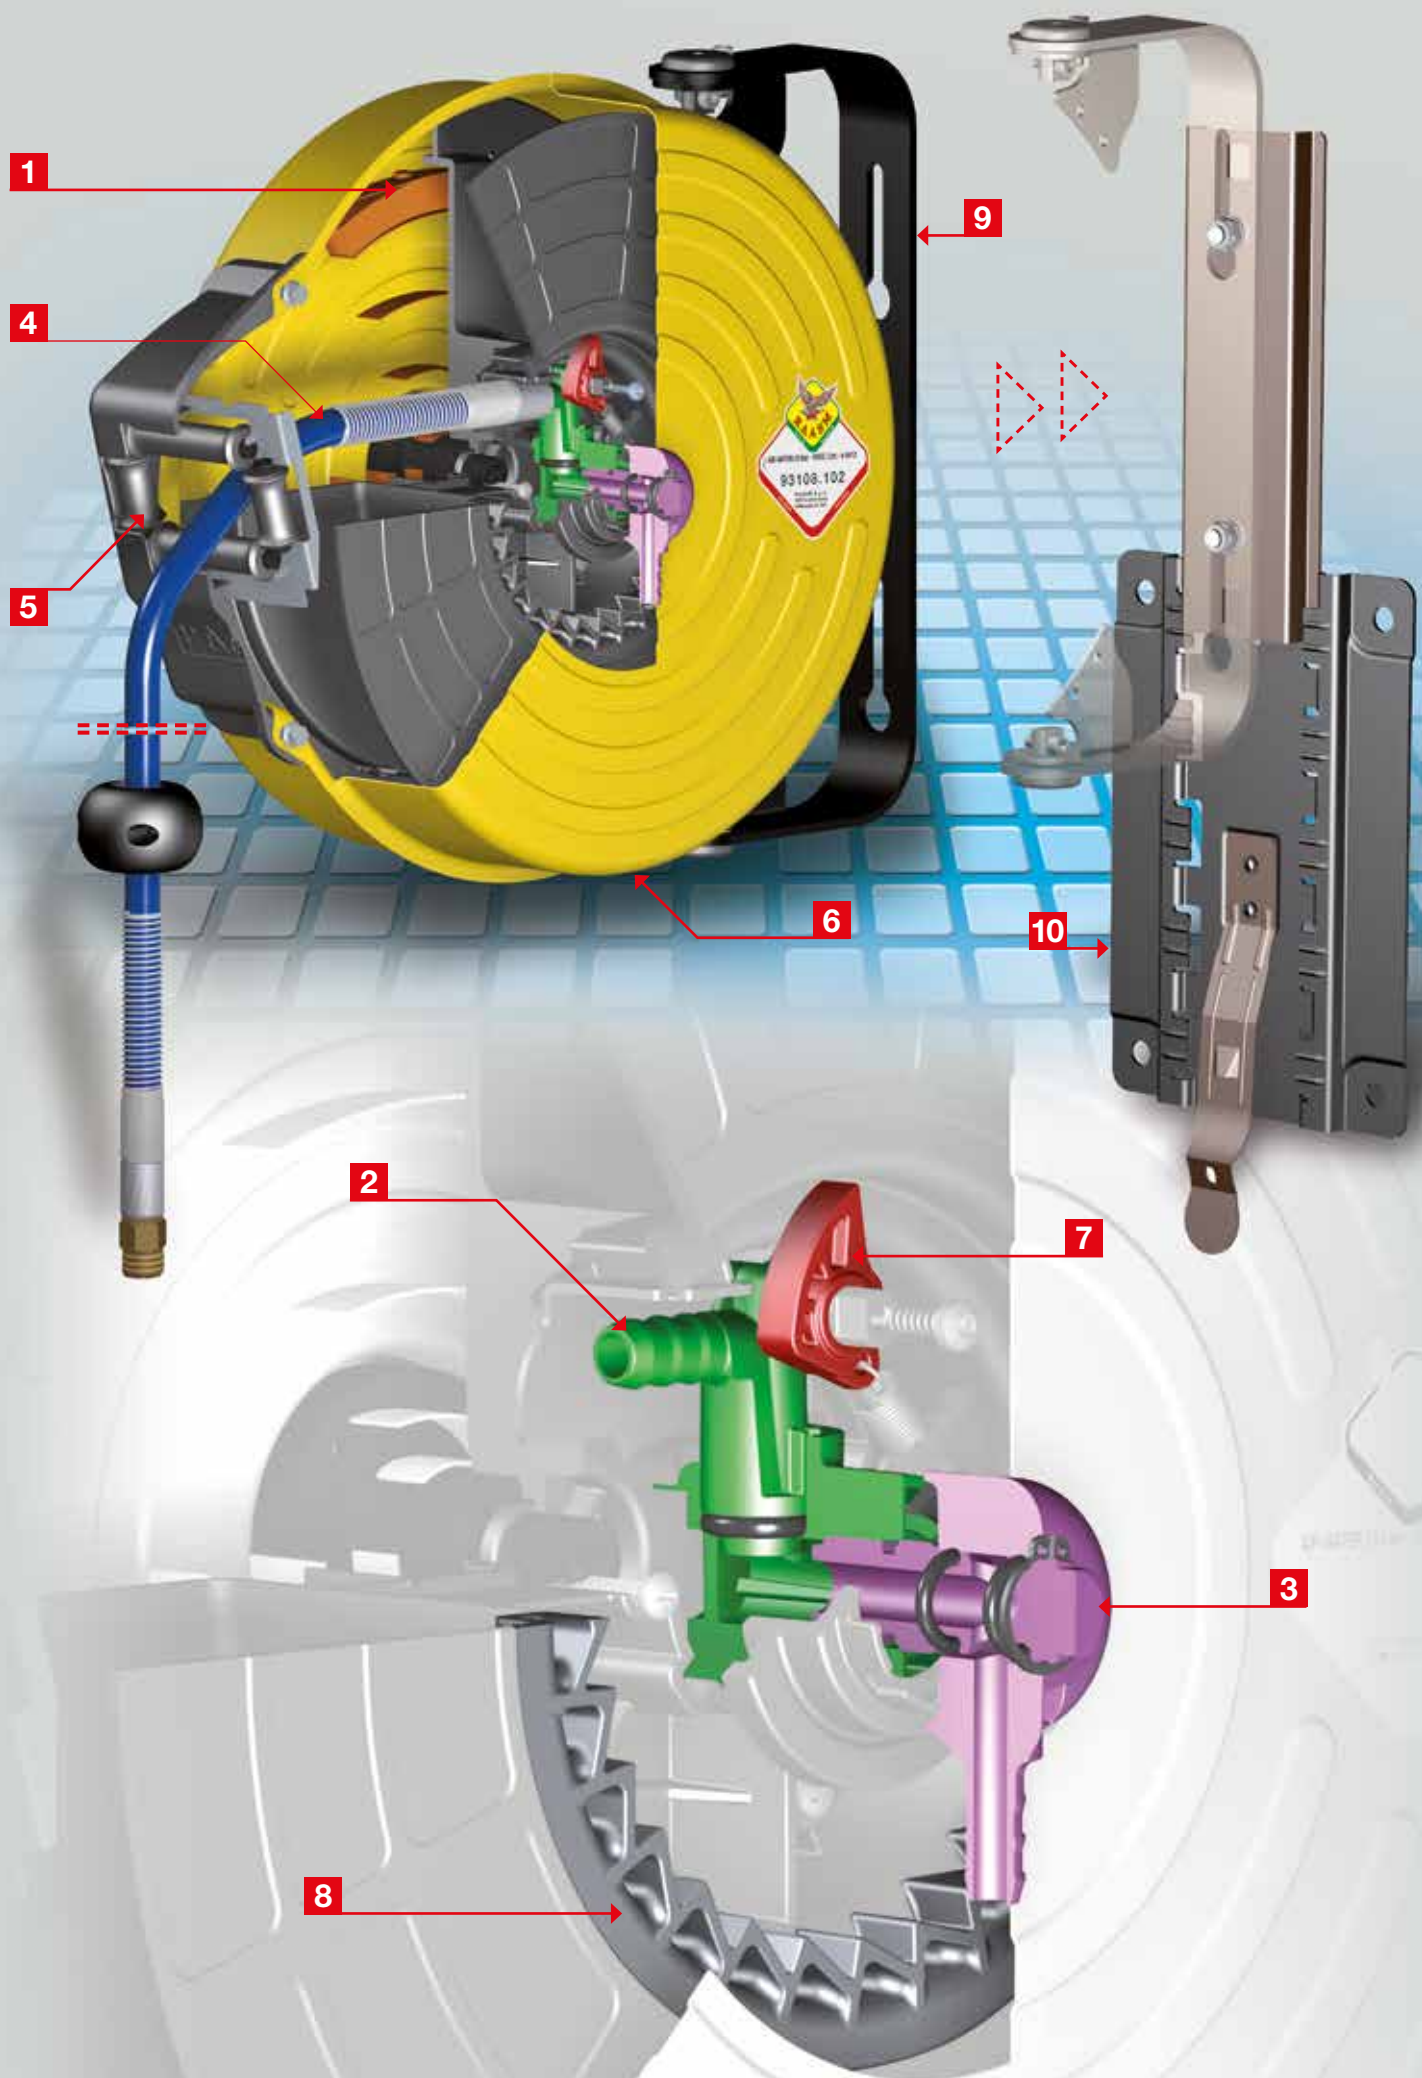



S. 250 - 300 ENCLOSED SWIVELLING PAINTED STEEL

► AIR-WATER 20 bar - 40 °C

► In accordance with directive   II 3 GD
c IIB TX



Series 250			
P/N	Hose supplied	Connection	
		inlet	outlet
6150	12 m - 8x12	M 3/8"G	M 1/4"G
5182	10 m - 10x14,5	M 3/8"G	M 3/8"G

Series 300			
P/N	Hose supplied	Connection	
		inlet	outlet
5185	12 m - 8x12	M 3/8"G	M 1/4"G
6151	15 m - 8x12	M 3/8"G	M 1/4"G
5187	20 m - 8x12	M 3/8"G	M 1/4"G
5188	12 m - 10x14,5	M 3/8"G	M 3/8"G
6152	15 m - 10x14,5	M 3/8"G	M 3/8"G

Supplied with:

- outlet swivel joint
- polyurethane hose (blue) with protection spring on connection
- brass fitting
- brass swivel joint
- Viton® seals
- inlet connection 1,5 m



COLORS


Standard
RAL1004 yellow




Optional
RAL7035 gray



Add the /C1 suffix to the P/N
to order the gray color

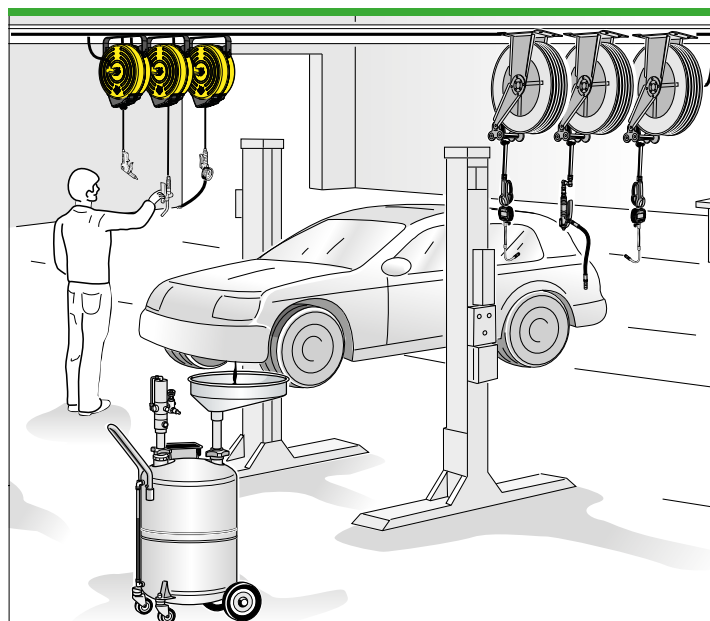

OVERALL DIMENSIONS (mm)

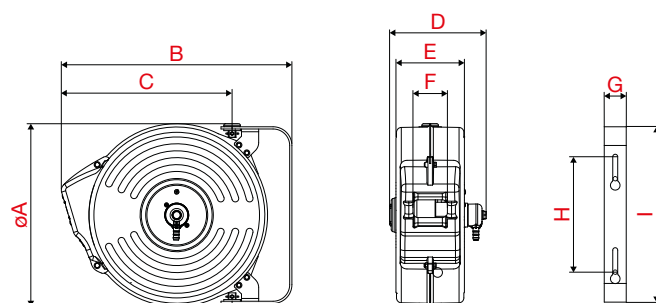

Series	A	B	C	D	E	F	G	H	I
250	281	338	230	173	124	62	40	from 130 to 210	319
300	330	416	308	174	124	62	40	from 130 to 210	319



S. 250 - 300 ENCLOSED SWIVELLING STAINLESS STEEL AISI 304

► WATER-DETERGENT 20 bar - 70 °C

► In accordance with directive   II 3 GD
c IIB TX



Series 250			
P/N	Hose supplied	Connection	
		inlet	outlet
6149	12 m - 8x12	M 3/8"G	M 1/4"G
5184	10 m - 10x14,5	M 3/8"G	M 3/8"G

Series 300			
P/N	Hose supplied	Connection	
		inlet	outlet
5190	12 m - 8x12	M 3/8"G	M 1/4"G
5191	15 m - 8x12	M 3/8"G	M 1/4"G
5192	20 m - 8x12	M 3/8"G	M 1/4"G
5193	12 m - 10x14,5	M 3/8"G	M 3/8"G
5194	15 m - 10x14,5	M 3/8"G	M 3/8"G

Supplied with:



- outlet swivel joint
- polyurethane hose (blue) with protection spring on connection
- stainless steel AISI 304 fitting
- stainless steel AISI 304 swivel joint
- Viton® seals
- inlet connection 1,5 m




SPECIAL HOSE

Swivel joint to facilitate the use of air-operated tools

Hose anti-bending spring

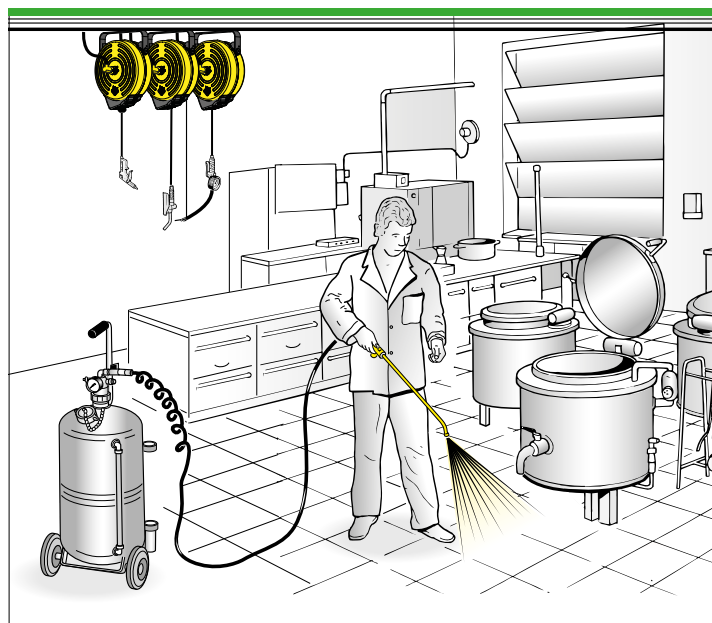

OVERALL DIMENSIONS (mm)

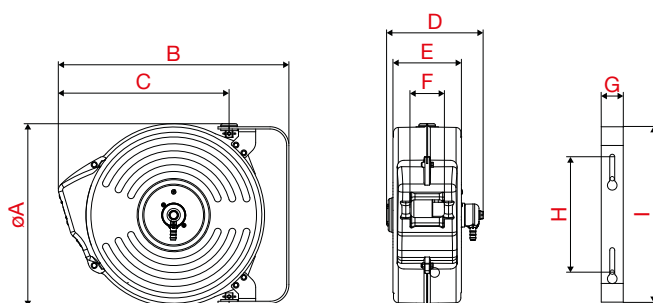

Series	A	B	C	D	E	F	G	H	I
250	281	338	230	173	124	62	40	da 130 a 210	319
300	330	416	308	174	124	62	40	da 130 a 210	319




S. 250 SERVICE COLUMNS

ZINC PLATED STEEL WITH ABS DRUM


► AIR-WATER 20 bar - 40 °C

► In accordance with directive   II 3 GD
c IIB TX

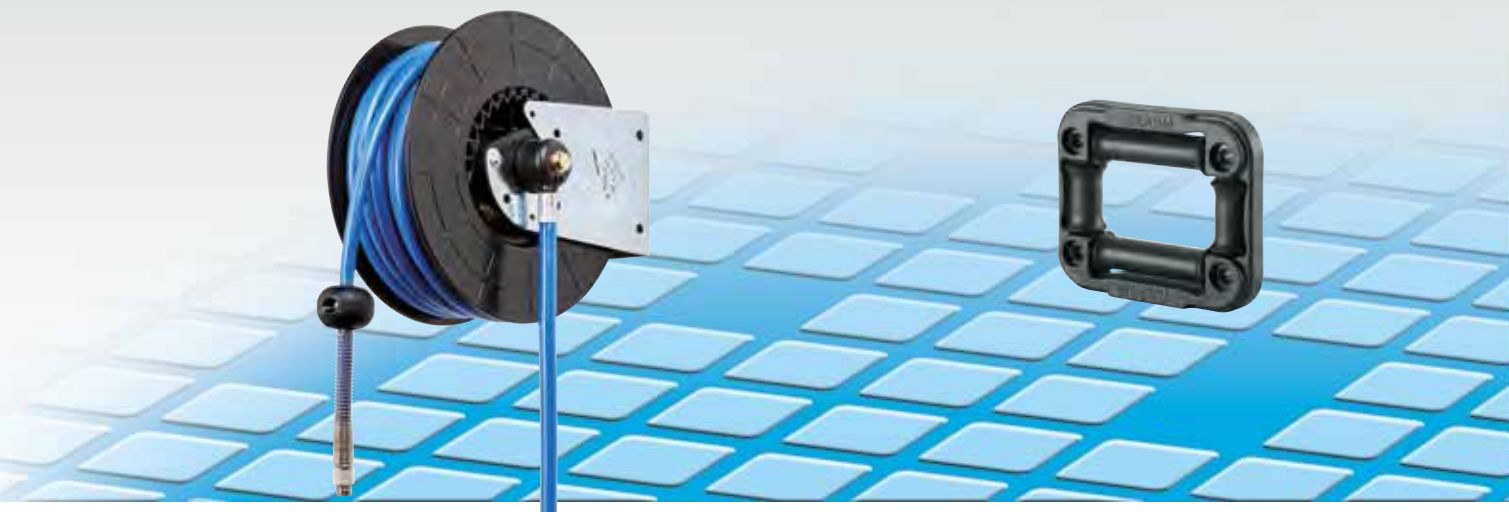

Series 250			
P/N	Hose supplied	Connection	
		inlet	outlet
5179	12 m - 8x12	M 3/8"G	M 1/4"G
5180	10 m - 10x14,5	M 3/8"G	M 3/8"G


OVERALL DIMENSIONS (mm)

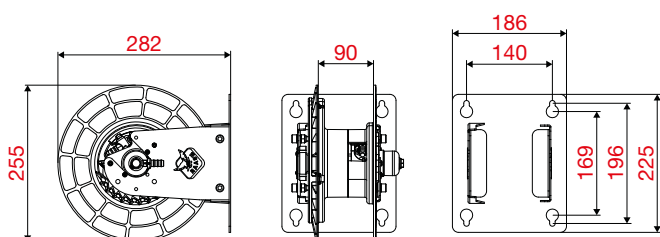

P/N 5653


Hose guide with 4 opposed rollers for application of service columns in technopolymer

OVERALL DIMENSIONS (mm)




► **Supplied with:**

- outlet swivel joint
- polyurethane hose (blue) with protection spring on connection
- brass fitting
- brass swivel joint
- Viton® seals
- inlet connection 1,5 m

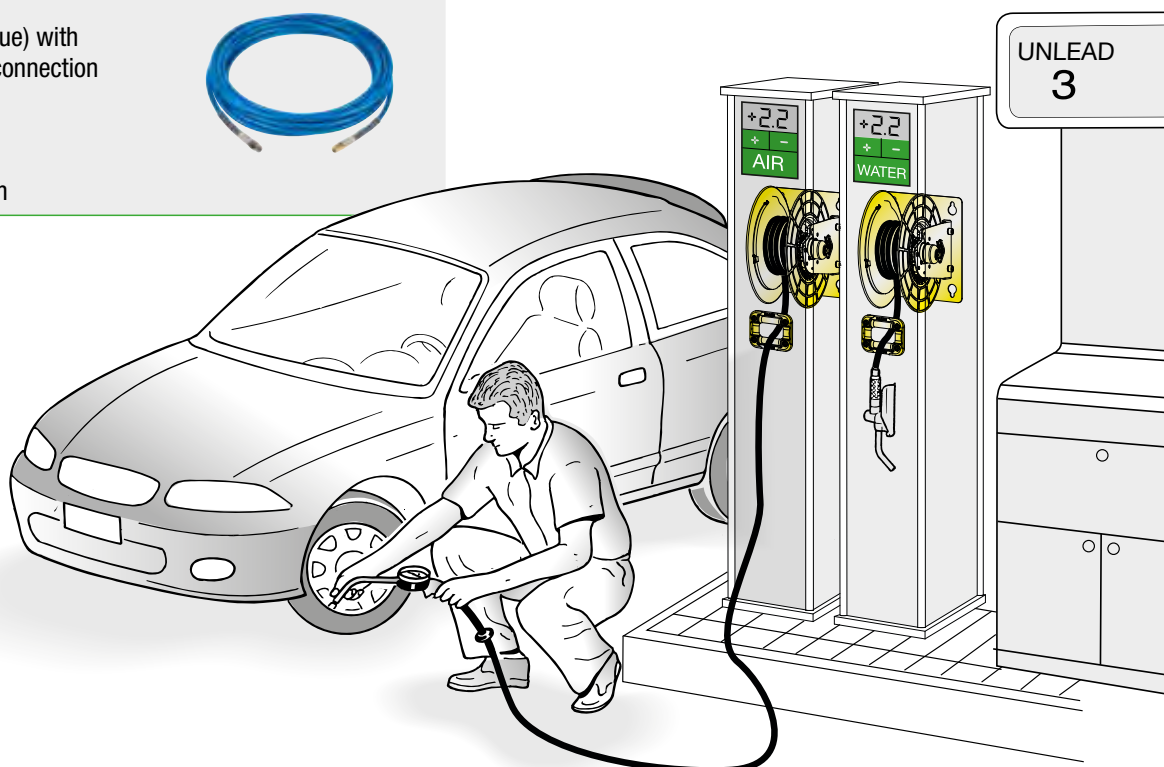EXAMPLE of use


RAASM has created a wide range of industrial hose reels to meet the most complex needs in various application sectors such as: industry, agriculture, depots and refineries, mining, aviation, shipyards, fire brigades, automotive, etc.

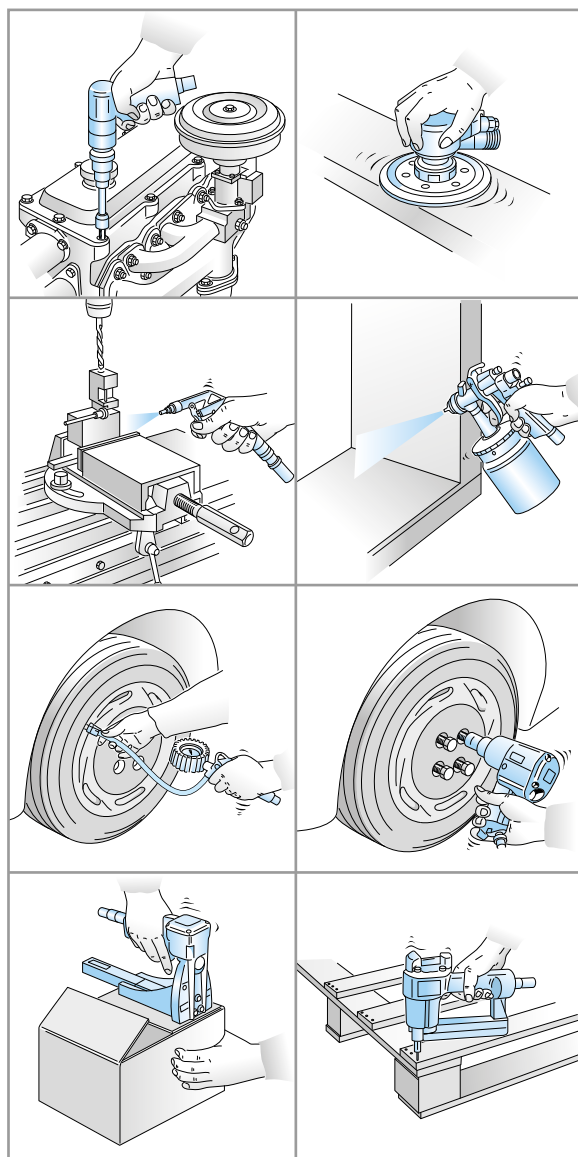

P/N 5652

Wall support for bayonet hooking in painted steel (on request for series 250-300 adjustable).

With the placing of several wall supports for bayonet hooking (on request) at the points of use, they allow easy movement of the hose in the various work positions.

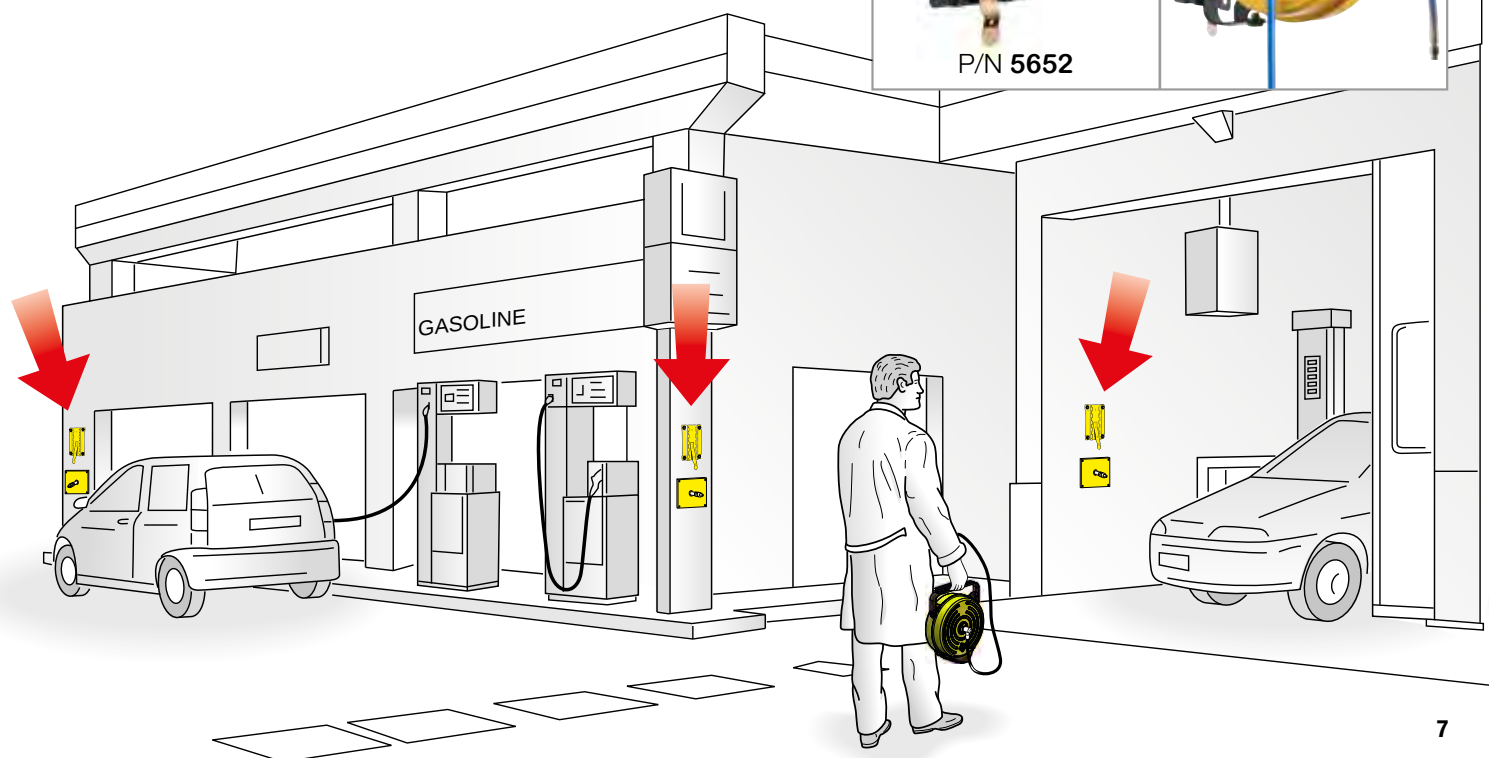



TECNOLOGÍA

La investigación y el desarrollo de nuevas soluciones que acabarán convirtiéndose en productos de vanguardia de la más alta calidad totalmente fabricados en Italia, es el principal punto de partida de todo el ciclo de producción



CALIDAD

Desde siempre, la calidad es una preocupación básica en la creación de productos **RAASM**. Para obtenerla es indispensable la ejecución de un sinfín de pruebas altamente exigentes y rigurosas



FUNCIONABILIDAD

RAASM dispone de la más completa gama de productos para lubricación y distribución de fluidos. El objetivo es el de dar siempre una respuesta satisfactoria a las demandas de nuestros clientes y cubrir sus exigencias



Company with an
ISO 9001:2015
certified quality
management system

RAASM S.p.A.
36022 S. ZENO DI CASSOLA (VI)
Via Marangoni, 33 - ITALY

GF GESFLUID

GESTIÓN INTEGRAL DE EQUIPAMIENTOS INDUSTRIALES / INTEGRAL MANAGEMENT FOR INDUSTRIAL EQUIPMENTS

C/Candás, 20 Bajo - 33207 Gijón - Asturias - España
Tel. (+34) 984 05 00 90
gesfluid@gesfluid.es - www.gesfluid.es